

FIG. 1

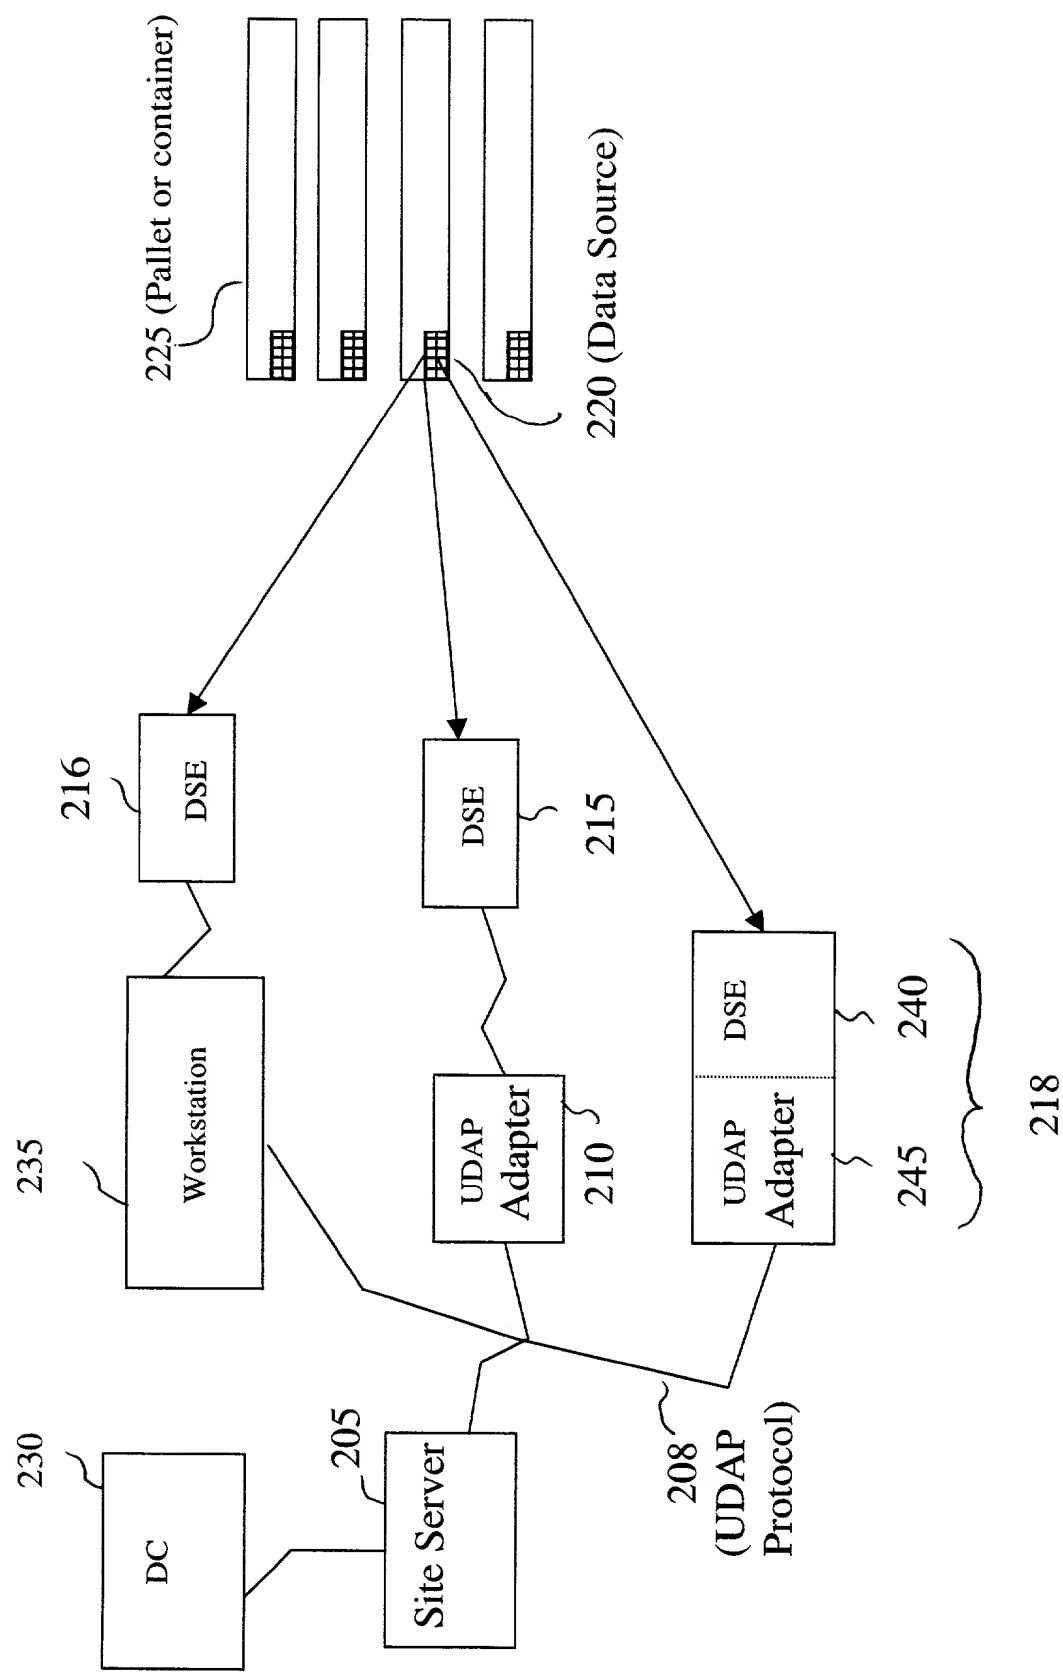


FIGURE 2

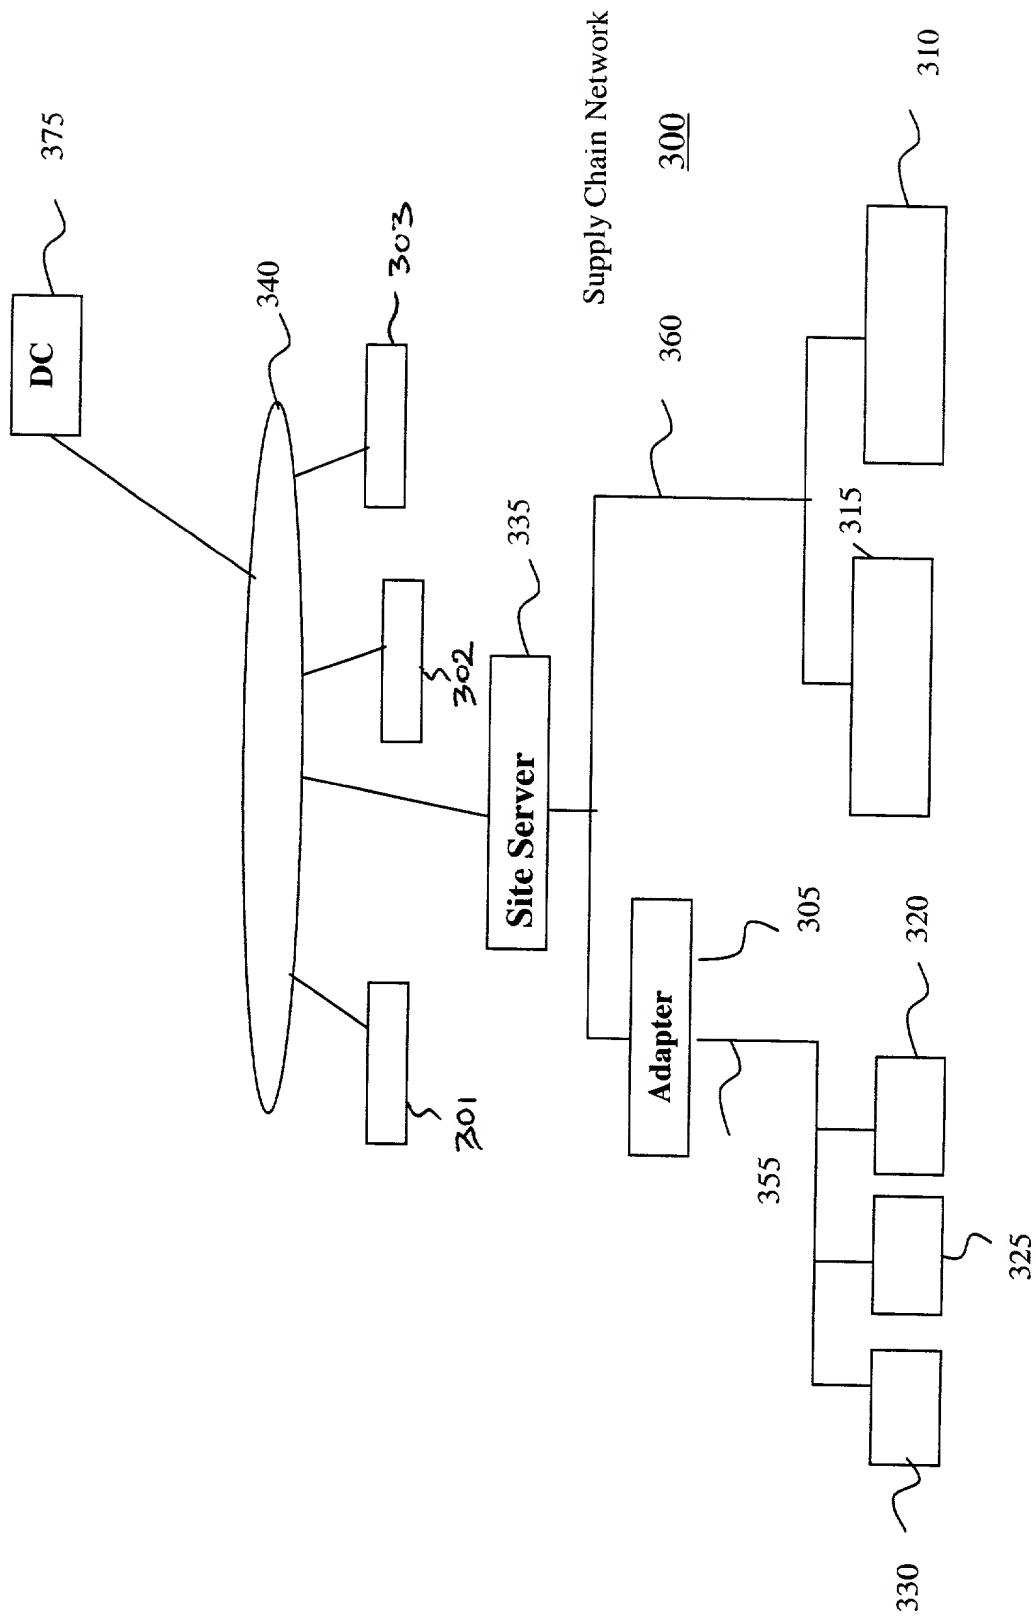


FIG. 3



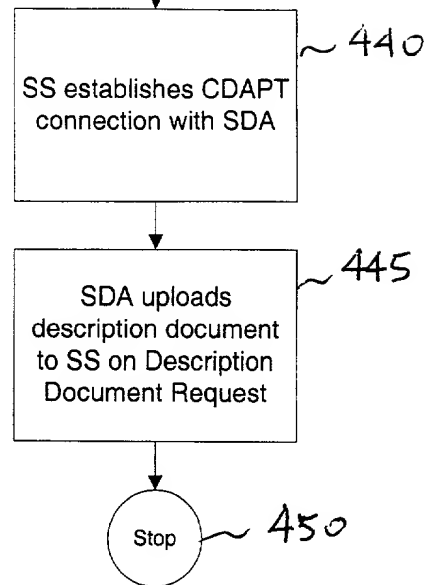


FIGURE 4


FIGURE 5A

500 ~
 <sda>
 <udap>0.88</udap>
 <devapp>Jeff Bain #1</devapp>
 <manufacturer>Savi</manufacturer>
 <url>www.savi.com</url>
 <product>Savi Data Appliance</product>
 <model> 915</model>
 <date>27-10-00</date>
 <udn>0000:00000915:000001</udn>
 <name>Refrigarator3</name>
 <notepad>Custom for GP monitors temerature</notepad>
 <control>TESTMODE</control>
 <service></service>
 <log >
 <control></control>
 <service></service>
 <event code=5>LOST</event>
 <queued>0</queued>
 <lost>0</lost>
 <clear/>
 <threshold>70</threshold>
 <capacity>32768</capacity>
 <delay>30</delay>
 505 ~
 </log>
 <reset/>
 510 ~
 <rfid >
 <name>AWID Model 1</name>
 <version>123456</version>
 <description>service by NC on 12/31/01</description>
 <control>ENABLE</control>
 <service></service>
 <antenna >
 <event>FAIL+RESTORE</event>
 <RSSI>0</RSSI>
 </antenna>
 <antenna>
 <event>FAIL+RESTORE</event>
 <RSSI>0</RSSI>
 </antenna>
 <analog>
 <power>10</power>
 <sensitvity>3</sensitvity>
 </analog>
 <collect>
 <event>DEPARTURE</event>
 <eventcfg>
 <source>INDEX</source>
 <rssi>YES</rssi>
 </eventcfg>
 <control>COLLECT</control>
 515 ~


FIGURE 5B

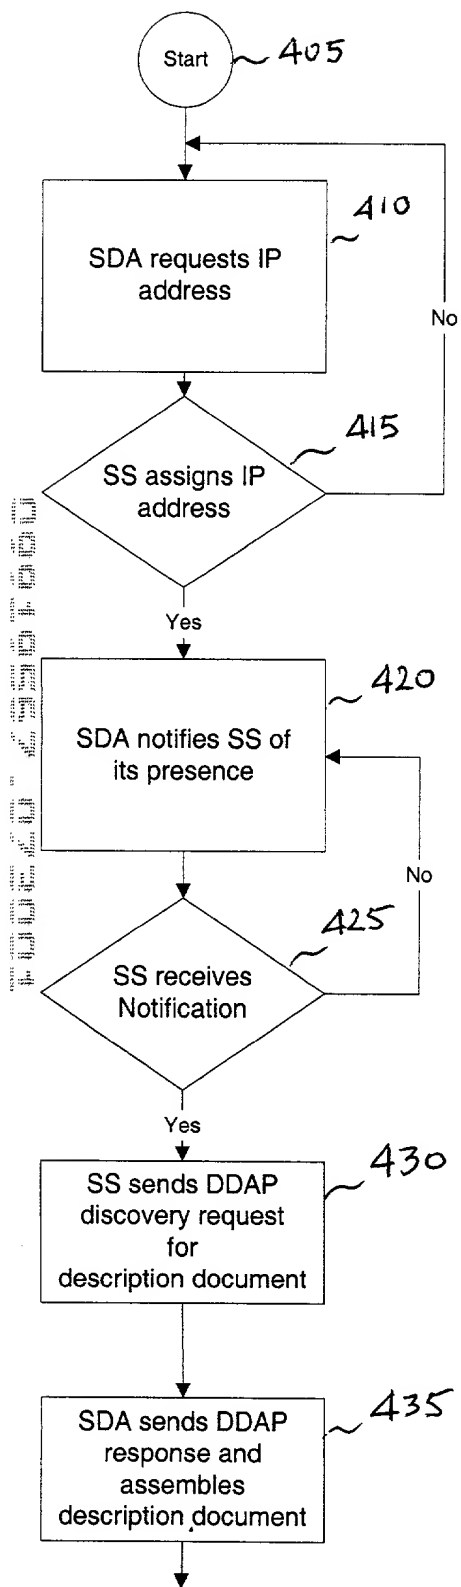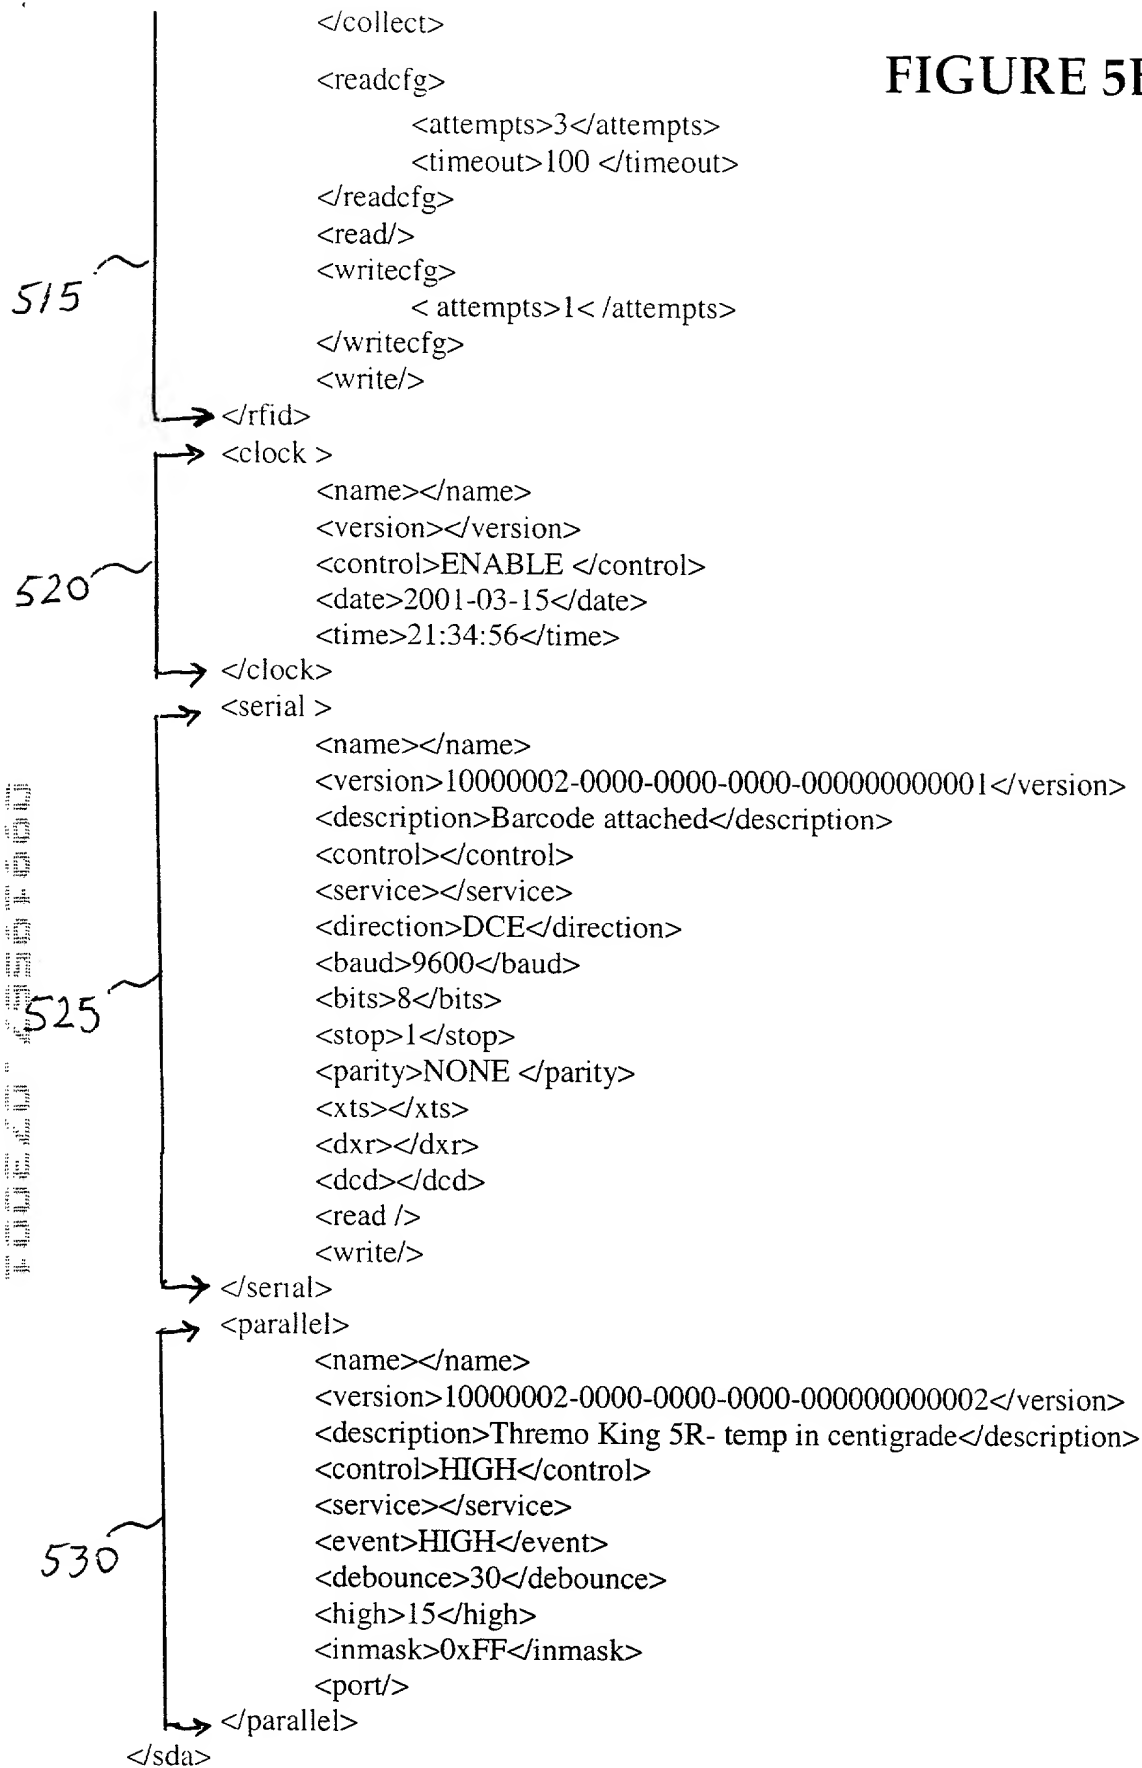

name: DOCK12
ip: 169.254.1.22
udn: 0000-00734567-000001
model: TagMaster Bridge
service: OK
rfid[0] inbound
service : OK
rfid[1] outbound
service : OK

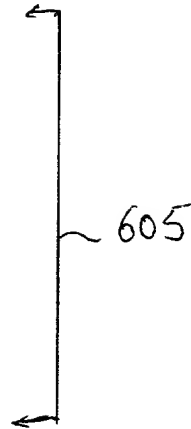

name: Wash Station
ip: 169.254.1.23
udn: 0000-00734567-000002
model: SDA915
service: OK
rfid: amtech/scs
service: OK
serial: Symbol PDF-417
service: OK

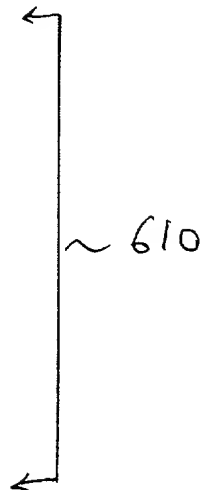

name: Refrigerator
ip: 169.254.1.27
udn: 0000-00734567-000023
model: SDA915
service: DEVICE
rfid: (none)
service: ANTENNA
serial: ThermoKing 780
service: OK

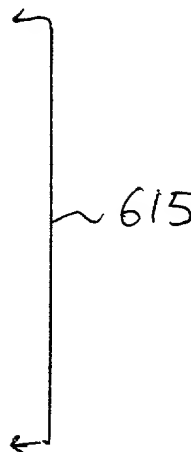


FIGURE 6

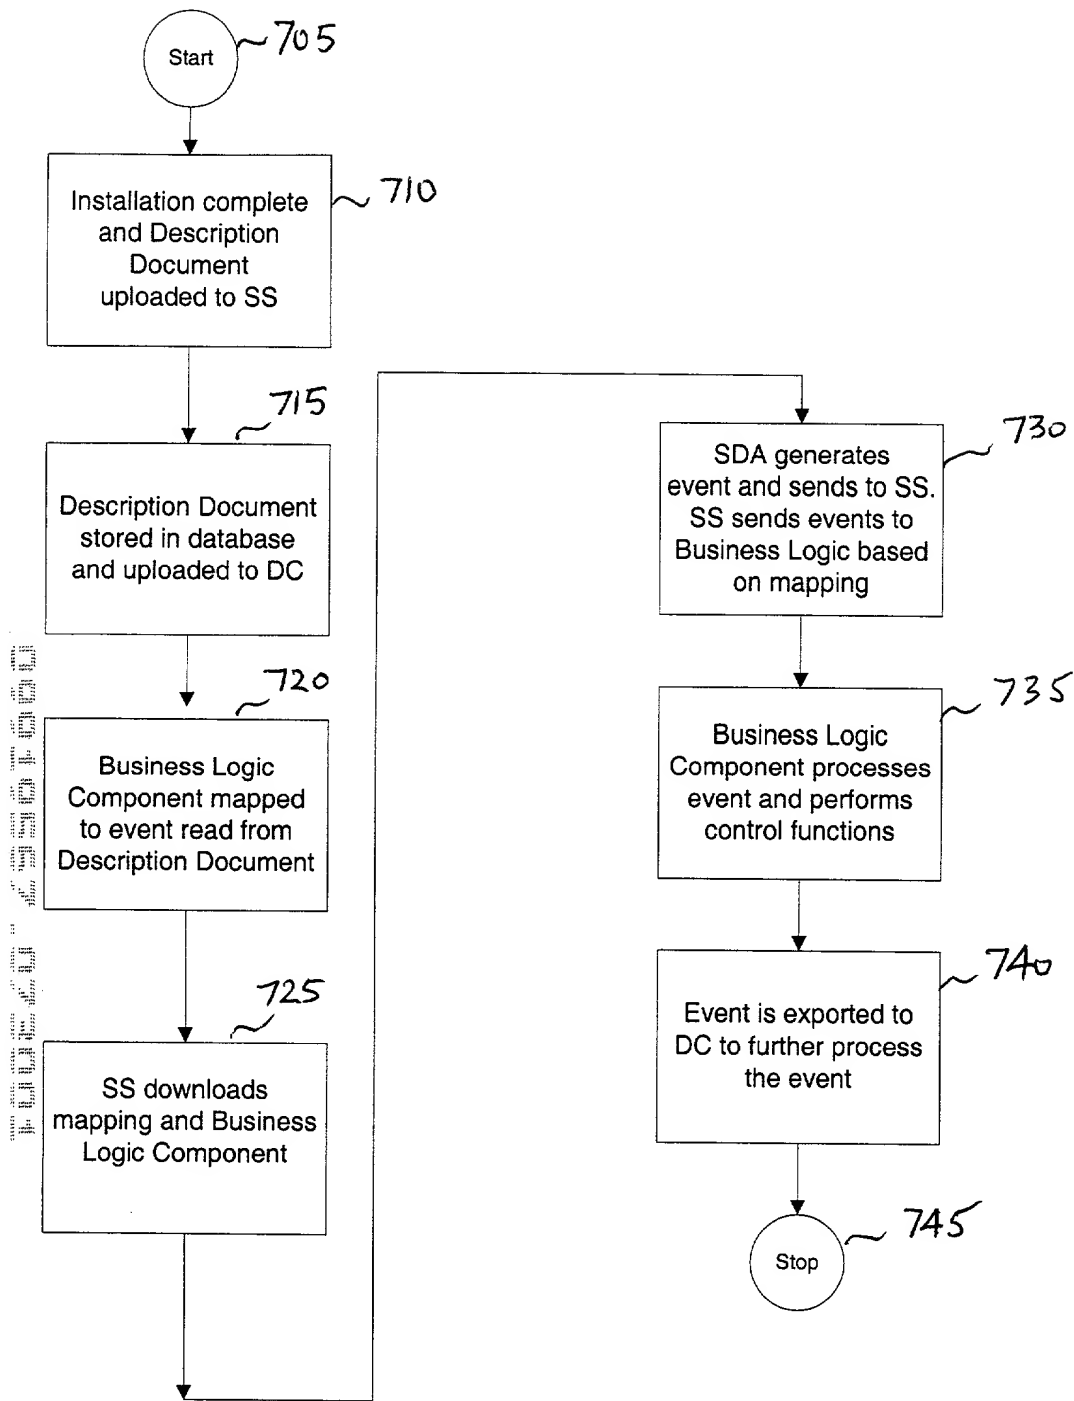


FIG. 7